

PISTON WEAR RING


GLAND CALCULATION SHEET

HPS inc

Follow these steps to arrive at
Finished Piston
Gland Dimensions

Standard Wear Ring Thickness(es)
 W6 = .057/.060"
 WT = .075/.080
 WH = .122/.125
 WR = .120/.125
 WB = .184/.187

Direct Force 2.500" Piston Wear Strip

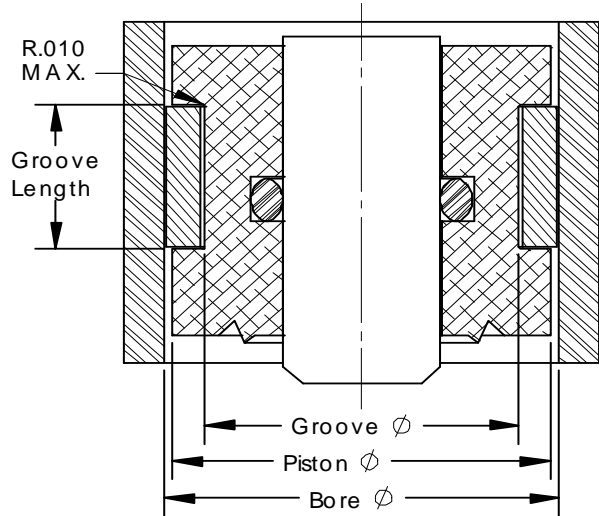

STEPS

All Dimensions are in inches.

1. List All "Knowns"

List this data before you begin any calculations. Select A and B from this brochure and C, D and E from your materials and machining capabilities.

A	⇒ Ring Part No.:						
B	⇒ Ring Thickness:	Min.	_____	Max.	_____		
C	⇒ Machining Tolerance:		_____		_____		
D	⇒ Bore Size:	Min.	_____	Max.	_____		
E	⇒ Min. Metal to Metal Clearance: (Desired)		_____		_____		
	Max. Metal to Metal Clearance is:		_____		_____		

Note: When selecting this clearance consider the Piston Seal.
 Large clearances require anti-extrusion devices to protect the seal.

2. Calculate Groove Diameter

Subtract .001" from the minimum bore, then subtract twice the maximum ring thickness, and subtract the machining tolerance.

	⇒		-	.001	=		
	⇒		-		=		
F	⇒		/		=	Groove Dia.	

3. Calculate Piston O.D.

Add twice the minimum ring thickness to minimum Groove Diameter from Step 2.
 Subtract twice the minimum desired metal to metal clearance, and subtract the machining tolerance.

	⇒		+		=		
	⇒		-		=		
G	⇒		/		=	Piston O.D.	

4. Determine Groove Length

Add a +.010/.020" tolerance to the maximum ring width (axial length).

- a) Note: Above applies for A.L. up 1.499"
- b) For 1.500 to 3.999" A.L. add +.020/.030"
- c) For 4.000 to 6.999" A.L. add +.030/.040"
- d) For A.L. above 7" consult Tech Center

	⇒	Max. Ring Width					
H	⇒		/		=	Groove Length (N/A)	

Note: Properly applied Hydra-Lon™ rings always provide clearance between the piston and bore. Check and be certain that the piston seal selected will not extruded into this clearance.